

03/03/00
jc781 U.S. PTO

03-0600

COOPER & DUNHAM LLP
1185 Avenue of the Americas, New York, NY 10036
(212) 278-0400

A

Date: March 3, 2000
Atty Docket No. 7217/61035

TO THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office of an application for patent in the name(s) of:

Yoji Kawamoto, Isao Hidaka, and Tomohiro Tsunoda
entitled: NETWORK SYSTEM, TERMINAL DEVICE, AND NETWORK SERVER
Small entity status under 37 CFR 1.9(f) is
claimed and the amounts shown in parentheses below have been
employed.

The following are enclosed:

- ☒ Specification
- ☒ 8 Claims(s) (including 3 independent claim(s))
- ☒ Preliminary Amendment
- ☒ Unsigned Oath or Declaration, Power of Attorney & Petition
- ☒ 8 Sheet(s) of Drawings
- ☒ Our check for \$690.00 calculated as follows:

Basic Fee of \$690 (\$345) \$ 690.00
Total Claims in excess of 20 at \$18 (\$9).....\$.00
Ind. Claims in excess of 3 at \$78 (\$39).....\$.00
Fee of \$260 (\$130) for Mult. Dep. Claim.....\$.00
Total Filing Fee \$690.00
Assignment Recording Fee of \$40\$.00

☒ Certified copy of each of the following to
substantiate the claim for priority:

<u>Application No.</u>	<u>Filing Date</u>	<u>Country</u>
P11-055625	March 3, 1999	JAPAN

☒ Please charge any additional fees required for the filing of this application and any other fees required during the pendency of this application or credit any overpayment to Deposit Account No. 03-3125. A duplicate copy of this letter is enclosed.

Respectfully submitted,

COOPER & DUNHAM LLP

By: Jay H Maioli
Jay H Maioli
Reg. No. 27,213

jc690 U.S. PTO
09/518808
03/03/00

0954123029-10303000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Yoji Kawamoto et al.
Serial No.:
Filed :
For : NETWORK SYSTEM, TERMINAL
DEVICE AND NETWORK SERVER

March 3, 2000
1185 Avenue of the Americas
New York, NY 10036
(212) 278-0400

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Prior to the initial examination of the above-identified application, Applicants respectfully requests that the application be amended as follows.

IN THE SPECIFICATION

Page 23, line 14, delete "been";
line 20, delete "been".
Page 35, line 17, delete "been";
line 21, delete "been".

IN THE ABSTRACT OF THE DISCLOSURE

line 2, change "capable of specifying" to --specify-

-;

line 3, after "of" insert --the--;

line 5, change "means" to --system--.

IN THE CLAIMS

Please amend claims 1-8 by rewriting same to read as follows.

--1. (Amended) A network system [to be] connected to a terminal device and a network server via [the] a predetermined communication [means] system, comprising:

[said terminal device] means for transmitting [the] user specific information and [the] information of said terminal device [to be] used by [said] a user as the user specific information when the user uses said terminal device, wherein said means for transmitting is part of said terminal device; and

[said network server to specify] means for specifying said terminal device being used by said user by memorizing said specific information, wherein said means for specifying is part of said network server.

--2. (Amended) The network system according to claim 1, wherein

said terminal device [comprising an] further comprises interface means equipped with [the] memory

means in which said user specific information is stored, and said means for transmitting transmits said specific information to said network server when said memory means is loaded.

--3. (Amended) The network system according to claim 2, wherein[:]

said [terminal device] means for transmitting transmits information showing [the] completion of [said] a user operation to said network server when said memory means is extracted from said interface means.

--4. (Amended) A terminal device [to be connected] for connection to [the] a network server via [the] a predetermined communication [means] system, comprising:

means for connecting said terminal device to said network server; and

[a] specific information transmission means for transmitting [said] user specific information and [said] terminal device specific information to said network server as [the] specific information [in the case where the] when a user uses said terminal device.

--5. (Amended) The terminal device according to claim 4, further comprising[:

an] interface means equipped with memory means in which said user specific information is stored[; and characterized by:] , wherein

said terminal device transmits said specific information to said network server when said memory means is loaded.

--6. (Amended) The terminal device according to claim 5, wherein

said terminal device transmits information showing [the] completion of [said] a user operation when said memory means is extracted from said interface means.

--7. (Amended) A network server [to be connected] for connection to [the] a terminal device via [the] a predetermined communication [means] system, comprising:

[a] specific information receiving means for receiving [said] specific information formed of [said] user specific information and [said] user using terminal device specific information [to be] transmitted from said terminal device when [the] a user uses said terminal device;

[a] memory means for memorizing the specific information received by said specific information receiving means; and

[a] specifying means for specifying the terminal device being used by said user based on said specific information of said memory means.

--8. (Amended) The network server according to claim 7, wherein

said specifying means[,

transmits] includes means for transmitting message information to said user [to] of the terminal device [in use] by said user [specified] specific information based on the specific information of said memory means.--

REMARKS

Claims 1-8 remain in the application and have been amended hereby.

As will be noted from the Declaration, Applicants are citizens and residents of Japan and this application originated there.

Accordingly, the amendments made to the specification are provided to place the application in idiomatic English, and the claims are amended to place them in better condition for examination.

61035

An early and favorable examination on the merits is earnestly solicited.

Respectfully submitted,

COOPER & DUNHAM LLP

Jay A. Maioli

Jay H. Maioli
Reg. No. 27,213

JHM : dmc d

NETWORK SYSTEM, TERMINAL DEVICE AND NETWORK SERVER

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a network system, terminal device and network server, and more particularly, is suitably applied to the network system, terminal device and network server for specifying the terminal device that is being used by the user who uses various terminal devices.

DESCRIPTION OF THE RELATED ART

Heretofore, there has been a system that offers various informations to the user terminal device, i.e., the personal computer, from the information providing means, i.e., the internet service provider (ISP) via the network such as internet.

In such system, the user operating the personal computer, by entering the identification (ID) and password for connecting to the service provider into the personal computer, the personal computer receives an authentication for receiving information from the service provider using the input ID and password.

In the conventional network system, such as shown in Fig. 1, a personal computer 2 is connected to the telephone line 4 via a modem 3, and a server 5B of the service provider 5 is connected to the telephone line 4 via an access server 5A.

Moreover, a network 8 constructed such as by the local area network (LAN) in the company is connected to the server 5B of the service provider 5 via Internet 7. In this case the personal computer 8B of the network 8 is connected to the Internet 7 via the firewall 8A, thus preventing the invasion of the third party into the network 8 from the outside.

However, in such system, the user had to use the mail address, connecting telephone number or ID properly in each network depending on when he uses the network 8 of the company, the service provider 5 using his personal computer 2 in his home and when he uses the portable telephone (not shown in Fig.).

Furthermore, if the user has contracts with the plural number of providers, it is necessary for the user to use the mail address, connecting telephone number or the authenticated ID in each provider properly, and it caused a problem in usability.

Furthermore, in the conventional system, when the user was connected to the network by using either one (television, portable telephone, personal digital assistance (PDA), etc) from among various terminals, it was difficult to specify the user in the network.

SUMMARY OF THE INVENTION

In view of the foregoing, an object of this invention is to provide a network system, terminal device and network server in which the user in the network can be specified even though the

user uses either one of the terminals.

The foregoing object and other objects of the invention have been achieved by the provision of a network system, terminal device and network server. When the user uses the terminal device, he transmits the user specific information and the terminal device specific information that the user uses to the network server as the specific information. The network server memorizes the specific information sent from the terminal in the database, and by detecting the database, can specify the terminal device being used by the user.

The nature, principle and utility of the invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings in which like parts are designated by like reference numerals or characters.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a brief linear connection diagram showing the construction of the conventional network system;

Fig. 2 is a brief linear connection diagram showing the general construction of a network system according to the present invention;

Fig. 3 is a block diagram showing the construction of a memory card according to the present invention;

Fig. 4 is a brief linear diagram showing a memory map of

the memory card;

Fig. 5 is a brief linear diagram showing the data format in the memory card;

Fig. 6 is a block diagram showing the construction of a television set;

Fig. 7 is a brief linear diagram showing the authentication sequence between the television set and the specified server;

Fig. 8 is a block diagram showing the construction of the specified server;

Fig. 9 is a brief linear diagram showing the authentication sequence between the television set and the server;

Fig. 10 is a brief linear diagram showing the message transmission procedure;

Fig. 11 is a brief linear diagram showing the sequence when the memory card is extracted;

Fig. 12 is a block diagram showing the construction of a personal computer; and

Fig. 13 is a block diagram showing the construction of a portable telephone.

DETAILED DESCRIPTION OF THE EMBODIMENT

Preferred embodiments of this invention will be described with reference to the accompanying drawings:

In Fig. 2, 10 generally shows a network system, and a service provider 21 is connected to telephone line 15 and

portable telephone line 33 via an access server 23.

The telephone line 15 is connected to terminal devices, i.e., a television set 13 and a personal computer (PC) 12 via a modem 14. And the television set 13 and the personal computer 12 can access to the service provider 21 via the telephone line 15. Moreover, the portable telephone line 33 is connected to the portable telephone 31 via the base station 32, and the portable telephone 31 can access to the service provider 21 via the portable telephone line 33.

In addition to the above, the service provider 21 is connected to the internet 41 via a server 24. And the network 45 consists of such as local area network (LAN) of the company that is connected to the internet 41 via the private line can access to the service provider 21 via the internet 41. In this case, the personal computer 47 of the network 45 is connected to the Internet 7 via the firewall 46, and thus prevented from the invasion of the third party into the network 45 from the outside.

Here, each terminal device (television set 13, personal computer 12, 47 and portable telephone 31) is equipped with a slot to load a memory card, that is a memory means. And when operating these terminal devices, the user places his personal memory card 11 to the terminal that he is operating. As shown in Fig. 3, the memory card 11 is comprised of a connector 11B for loading to the slot of each terminal device and a memory 11A connected to the connector 11B via a bus BUS.

card 11. More specifically, if the terminal device to be loaded with the memory card 11 is the television set 13, the uniform resource locator (URL) information for observing the explanation on the world wide web (WWW) per the television program calendar to be used or the television program, and if the terminal device to be loaded with the memory card 11 is the personal computer 12, the sentence or screen on the process of editing or the program under developing, and if the terminal device to be loaded is a portable telephone 31, character mail service data to be transmitted/received will be memorized respectively.

Furthermore, the fifth area AR15 is an area to memorize various types of data such as still pictures.

The data to be stored in the memory 11A of the memory card 11 is stored in the form such as the type length value (TLV) format shown in Fig. 5. This format is the format of data to be stored in each area (AR11 to AR15) of the memory map described above in Fig. 4, and each area (AR11 to AR15) consists of data type (TYPE) information D11, data length (LENGTH) information D12 and value (VALUE) information D13.

In this case, as the data type information D11 of the first area AR11 of the memory 11A, the code "00" showing the network connection information is allocated. And as the value information D13 of the first area AR11, information such as the authentication ID (user ID) and password will be stored. Moreover, TLV type format will be formed in each ID and password

to be stored as the value information D13, and the type information D13A, data length information D13B and value information D13C will be formed respectively.

Moreover, in the second area AR12 of the memory 11A, the code "01" showing the network additional information is allocated as the data type information D11, and additional information such as group ID and its password to be downloaded when receiving various services on the network from the service provider 21 will be stored as the value information of the second area AR12. The group ID is the identification information to be used when forming the specific group by the plural number of users who use the terminal. And then, the TLV type format will be formed per the group ID and its password to be stored as the value information D13, and type information D13A, data length information D13B and the value information D13C will be formed respectively.

Furthermore, in the third area AR13 of the memory 11A, the code "02" showing the personal information is allocated. And as the value information of the third area AR13, the information, such as the telephone directory, address data and personal schedule data, to be used personally by the user having the memory card 11, will be stored. And moreover, the TLV type format will be formed per the telephone directory, address data and personal schedule data to be stored as the value information D13, and the type information D13A, data length information D13B

and the value information D13C will be formed respectively.

Furthermore, in the fourth area AR14 of the memory 11A, the code "03" showing the information in each terminal is allocated as the data type information D11. And as the value information of the fourth area AR14, various kinds of terminal attributes as the information to be used per the terminal device to be loaded with the memory card 11 will be stored. And moreover, the TLV type format will be formed per the information such as a variety of terminal attributes to be stored as the value information D13C, and the type information D13A, data length information D13B and the value information D13C will be formed respectively.

Furthermore, in the fifth area AR15 of the memory 11A, various kinds of data to be read and written optionally will be stored as the data type information D11. And furthermore, the TLV type format will be formed per the data to be stored as the value information D13 and the type information D13A, data length information D13B and the value information D13C will be formed respectively.

Thus, the private information (such as ID, password) to specify the user who owns the memory card 11 and various information to be used by the user personally (personal information, information per terminal) will be memorized in the memory card 11. And when the user operates each terminal device, inserting the memory card 11 into the operating terminal, the user informs the network connection information, that is the

personal information to specify the user (authentication ID, password) to the specified server 22 of the service provider 21 via the operating terminal. And at this point, the relationship between the user operating terminal device and the user will be registered at the specified server 22.

As shown in Fig. 6, the television set 13 as the first terminal device comprises a data bus BUS connected respectively to a CPU 13A, memory 13B, memory card (MC) interface (INF) 13C, interface processing unit 13N, communication interface (INT) 13D, receiver circuit (RF) 13E and output unit 13F. The CPU 13A executes various operations according to the operation program stored in the memory 13B and controls each circuit unit according to the operations.

The radio frequency (RF) unit 13E receives television broadcast wave S_{RF} received via an antenna (not shown in Fig.) and transmits the received signal S_{13E} to the output unit 13F. The output unit 13F, by applying such as the intermediate frequency amplification processing, video detection processing to the received signal S_{13E} , forms a television video signal S_{TV} . And then, the output unit 13F, by sending this television video signal out to the cathode ray tube display (CRT) 13G, visually displays the television broadcast received at the RF unit 13E on the display screen of the CRT 13G.

When the user who is operating the television set 13 inserts his owned memory card 11 into the slot for memory card

00513003 030300

(not shown in Fig.), the contact point for detection of the memory card 11 is connected to the contact point of the memory card interface 13C. Then, the interface processing unit 13N detects the change of signal level for memory card detection (change from the logical "L" level to the logical "H" level) and thus, the interface processing unit 13N conducts the interrupt processing by outputting the interrupt signal to the CPU 13A. In this connection, the interface processing unit 13N is a processing block to conduct the protocol processing according to the interface specifications in receiving data with regard to the memory card 11. Thus, the interface processing unit 13N becomes in a state capable of reading out the user specific information memorized in the memory card 11.

The memory card interface 13C is comprised of serial interface and consists of at least 3 data lines. The first data line transmits a clock signal when transmitting the data, the second line transmits status signal necessary for transmitting the data, and the third data line transmits data to be written in the memory card 11 or read out serially.

Then, the CPU 31A reads out data from the memory card 11 via the memory card interface 13C and by transmitting this to the specified server 22 of the service provider 21 via the communication interface 13D, the modem 14 (Fig. 2) and the telephone line 15 (Fig. 2), conducts the authentication request to the specified server 22.

authentication request data D21 to the authentication unit 22B.

When contents of the authentication request data D21, the user ID and password agree with the preregistered data of the authorized user, the authentication unit 22B judges that the user operating the dispatching side (i.e., television set 13) of the authentication request data D21 is the authorized user, and registers informations to specify the user (user ID and password), that is the content of the authentication request data D21, information for terminal specification to specify the terminal device (the television set 13) operated by the user terminal type data, data to specify the dispatching means, the sender's telephone number and various optional data of the television set side) to the database 22D as the user and operating terminal combined data D23. At this point, when the existing composite data is stored in the database 22D, the database 22D renews data by writing the new composite data D23 supplied from the authentication unit 22B over the existing composite data.

Thus, in every time when the specific user operates new terminal device changing devices, the combined data of the terminal device to be operated and the user data will be registered in the database 22D.

With this arrangement, if it is determined that the authentication request is from the authorized user at the authentication unit 22B, the authentication unit 22B sends back authentication answer data D27 to the user operating terminal

device (television set 13) via the communication unit 22A (Fig. 7).

Thus, in the specified server 22 the terminal device, that is currently being used by the user, (television set 13) is registered with the user data combined. The information thus registered in the database 22D of the specified server 22 will remain in the database 22 even when the connection between the terminal device to be used by the user and the specified server 22 is cut off.

At this point, in the application processing unit 22C of the specified server 22, messages such as electronic mails to be mailed to the specified user from various terminal devices will be stored. And in the case of returning the authentication answer data D27 in response to the authentication request data D21 described above in Fig. 7, to the television set 13, if the message to the user who operates the television set 13 is arrived at the application processing unit 22C, the application processing unit 22C obtains the terminal device (television set 13) to be used by the user from the combined data of the database 22C according to a transmission command from the authentication unit 22B, and supplies the message to the user D25 and the type data of the terminal device to the media conversion unit 22E.

The media conversion unit 22E converts the message to the user D25 to the data format corresponding to the type of terminal device to be used by the user (television set 13) and transmits

user specific information and the specific information on the terminal device to be used at that time (television set 13) are registered on the specified server 22 combined, and thus, the specified server 22 can grasp whereabouts of the user.

In this connection, in the authentication sequence of Fig. 7, a message to the user is transmitted to the television set 13 from the specified server 22 when the user inserts the memory card 11 to the television set 13. However, instead, as shown in Fig. 9, the user, by transmitting the message request to the specified server 22 by operating the operation unit (not shown in Fig.) of the television set 13, the message to the user can be transmitted from the specified sever 22 to the television set.

As shown in Fig. 10, if the message information D24 to the user (Fig. 8) is transmitted from the other terminal devices to the specified server 22 under the condition in which the user inserts the memory card 11 into the television set 13 and registers the user's whereabouts to the specified server 22, the specified server 22 transmits this to the application processing unit 22C after receiving the message at the communications unit 22A. The application processing unit 22C detects the user's address from the database 22D based on the specific information of the user (such as user ID), who is the addressee of the message information D24 contained in the message information D24.

Then, the application processing unit 22C supplies the resulting information showing the user's address (television set

13), information showing the type of terminal device and the message information to the user D24 to the media conversion unit 22E.

The media conversion unit 22E converts the message to the user D24 to the data format corresponding to the type of the terminal device (television set 13) that the user uses at that time and transmits this through the communication unit 22 as the communication data D26 to the terminal device to be used by the user (television set 13) via the telephone line 15.

Accordingly, the specified server 22, by transmitting the message such as electronic mail mailed specifying the user from the other terminal device to the user's address, the television set 13, can transmit the message to the addressee user.

Thus, since the television set 13 displays the electronic mail transmitted from the specified server 22 on the screen of the CRT 13G, the user using the television set 13 can confirm the electronic mail to the user on the display screen of the television set 13.

The television set 13 received the message D24 transmits an answer signal to the specified server 22, and responding this the specified server 22 informs the receipt of the message D24 at the television set 13 to the terminal that is the dispatcher of the message D24 by ACK (acknowledge).

In this connection, if the user conducts the predetermined input operation when the user inserts the memory card 11 into the

specified server 22, and upon receiving this message, the authentication unit 22B of the specified server 22 erases the composite data of the user data and the terminal data (television set 13) registered in the database 22D, and transmits an answer signal to the television set 13. Thus, the television set 13 from which the memory card 11 is pulled out will be erased from registration as the user operating terminal device (location) in the database 22D of the specified server 22.

Furthermore, as shown in Fig. 12, the personal computer 12 as the second terminal device is comprised of a CPU 12A, memory 12B, memory card (MC) interface (INF) 12C, interface processing unit 12N, communication interface (INF) 12D and a display unit 12E which are connected to the data bus BUS. The CPU 12A conducts various operations according to operational programs stored in the memory 12B and controls each circuit corresponding to the operations. The contents of various processings of the CPU 12A will be displayed on the display unit 12E formed with such as crystal display panel.

When the user operating the personal computer 12 inserts his own memory card 11 into the slot for memory card, the contact point for the memory card 11 detection is connected to the contact point of the memory card interface 12C. And then, the interface processing unit 12N detects changes of the signal level for memory card detection (from the logical "L" level to the logical "H" level), and thus sending out an interrupt signal to

the CPU 12A, conducts the interrupt processing. Thus, the CPU 12A detects that the memory card 11 is inserted. In this connection, the interface processing unit 12N is a processing block to conduct the protocol processing according to the interface specifications in receiving data with regard to the memory card 11. With this arrangement, the interface processing unit 12N becomes in a state capable of reading out the user specific information.

At this point, the CPU 12A reads out data in the memory card 11 via the memory card interface 12C, and by transmitting this to the specified server 22 of the service provider 21 via the communication interface 12D, the modem 14 (Fig. 2) and the telephone line 15 (Fig. 2), conducts an authentication request to the specified server 22.

This authentication request sequence will be conducted as follows: When the memory card 11 is loaded onto the personal computer 12, the CPU 12A detects the loading condition of the memory card 11 via the memory card interface 12C and dispatches signal to the service provider 21 having the specified server 22 via the telephone line 15 and secures the communication path as in the case of the authentication request sequence in the television set 13 described above in Fig. 7.

Then, the CPU 12A of the personal computer 12, after establishing the session according to the Point to point protocol (PPP) processing, transmits an authentication request to the

specified server 22. As this authentication request data D21 (specific information), the CPU 12A transmits the information for user specification consists of the user ID and password for authentication in the network connection information (Fig. 4) stored in the memory card 11, the terminal type data (data showing the personal computer) stored in the memory 12B of the personal computer 12, information to specify the dispatching means, and the information for terminal specification formed of sender's telephone number and various option data of the personal computer side to the specified server 22.

The specified server 22 receives the authentication request data D21 to be transmitted from the user operating personal computer 12 at the communication unit 22A and supplies the authentication request D21 received to the authentication unit 22B.

In the case where contents of the authentication request data D21 such as the user ID and password agree with the authorized user data registered in advance, the authentication unit 22B judges the user operating the transmitting side of the authentication request data D21 (i.e., personal computer 12) at that time as the authorized user and registers the information to specify the user (user ID and password), these are contents of authentication request data D21, and the information for terminal specification (terminal type data, information to specify the transmission means, the sender's telephone number and various

option data of the personal computer side) to specify the user operating terminal device (personal computer 12) in the database 22D as the composite data D23 in which the user data and the terminal are combined. At this point, if existing combined data is stored in the database 22D, the database 22D writes newly combined data D23 to be supplied from the authentication unit 22B over the existing data and updates the data with the new composite data D23.

Thus, at this point, the registration showing that the user will use the personal computer 12 is conducted into the database 22D.

Here, in the application processing unit 22C of the specified server 22, messages such as electronic mails to be mailed to the specific user from various terminal devices are stored. In the case of transmitting the authentication answer data D27 corresponding to the authentication request data D21 to be transmitted to the specified server 22 from the personal computer 12 to the personal computer 12 from the specified server 22, if the message information to the user who is operating the personal computer 12 is arrived at the application processing unit 22C, the application processing unit 22C obtains the terminal device to be used by the user (personal computer 12) from the composite data of the database 22D by the transmission command from the authentication unit 22B and supplies the message to the user D25 and type data of the terminal device to the media

[illegible]

Thus, when the user, inserting the memory card 11 into the personal computer, registers his address to the specified server 22, the message to the user is displayed on the display unit 12E of the personal computer 12.

In the case of transmitting the authentication request data D21 to the specified server 22 from the personal computer, the authentication request data D21 can be encrypted by the cypher algorithm forming one directional random pattern called as MD5.

And by transmitting such encrypted authentication request data D21, tapping of the data necessary for authentication such as the user ID and password can be prevented.

Thus, at the time when the user using the personal computer 12, by inserting the memory card 11 into the slot of the personal computer 12, the user specific information and the terminal specific information (personal computer 12) can be registered in the specified server 22 as a set. And thus, the specified server 22 can grasp the user's whereabouts.

In this connection, the authentication sequence described above has dealt with the case of transmitting the message to the user from the specified server 22 to the personal computer 12 when the user inserts the memory card 11 to the personal computer 12. However, as in the case of television set 13 described above in Fig. 9, the user transmitting the message request to the specified server 22 by operating the keyboard (not shown in Fig.) of the personal computer 12, the message to the user can be transmitted to the personal computer 12 from the specified server 22.

At this point, as in the case of television set 13 described above in Fig. 10, under the condition in which the user inserts the memory card 11 into the personal computer 12 and registers the user's whereabouts to the specified server 22 (Fig. 8), if the message information D24 to the user is transmitted to the specified server 22 from other terminal devices, the

specified server 22, upon receiving the message information D24 at the communication unit 22A, sends this out to the application processing unit 22C. The application processing unit 22C detects the user's address from the database 22D based on the user specific information (such as user ID) contained in the message information D24.

Then, the application processing unit 22C supplies the resulting information showing the user's address (personal computer 12), and information showing the type of terminal device and the message information to the user D24 to the media conversion unit 22E.

The media conversion unit 22E converts the message information to the user D24 to the data format corresponding to the type of terminal device that the user uses (personal computer 12) and transmits this through the communication unit 22A to the terminal device to be used by the user (personal computer 12) as a message data D26 via the telephone line 15.

Accordingly, the specified server 22, by transmitting the message such as electronic mails mailed from the other terminal device by specifying the user to the personal computer 12, that is the user's address, can transmits the message information to the addressee user.

Thus, since the personal computer 12 displays the electronic mail transmitted from the specified server 22 on the screen of the display 12E, the user using the personal computer

12 can confirm the electronic mail to the user on the display screen of the display unit 12E of the personal computer 12.

The personal computer 12 upon receipt of the message information D24, transmits an answer signal to the specified server 22, and responding this, the specified server 22 informs the receipt of message information D24 at the personal computer 12 to the sender terminal of the message information D24 by ACK (acknowledge).

When the user pulls out the memory card 11 from the slot of personal computer 12, the contact point for detection of the memory card 11 is separated from the contract point of the slot of the memory card interface 12C, the interface processing unit 13N detects changes of the signal level for memory card detection (change from the logical "H" level to the logical "L" level), and by transmitting an interrupt signal to the CPU 12A, conducts the interrupt processing. Thus, the CPU 12A detects that the memory card 11 is extracted.

At this point, since the CPU 12A transmits an erasure request containing the user ID and terminal type data (data showing the type of the personal computer 12) to the specified server 22 as in the case of television set 13 described above in Fig. 11, the authentication unit 22B upon receiving this, erases the user and terminal device (personal computer 12) combined data and sends back an answer signal to the personal computer 12. The personal computer 12 from which the memory card 11 is extracted

will be deleted from the registration as the user's operating terminal device (location) in the database 22D of the specified server 22.

In this connection, when the personal computer 12 is connected by the small office/home office (SOHO) router in place of the modem 14, if the Network address translation (NAT) to convert the private address and global address, the dynamic host configuration protocol (DHCP) to allocate IP address dynamically or IP masquerade would be used, it becomes difficult for the specified server 22 to uniquely identify the terminal. And in this case the name of personal computer can be included in the authentication request data and transmitted to the specified server 22 from the personal computer 12.

Accordingly, in this case, when the user inserts the memory card 11 into the personal computer 12, the personal computer 12 transmits user specifying information formed of user ID and password for authentication in the network connection information (Fig. 4) stored in the memory card 11, the terminal type data (data showing the personal computer) stored in the memory of the personal computer 12 in advance, information to specify the signal dispatching means (such as ISDN), sender's telephone number, Internet protocol (IP) address of the personal computer 12, the name of personal computer 12 and terminal specifying information formed of various option data to the specified server 22 as the authentication request data. With this arrangement,

the specified server 22 can uniquely identify the personal computer 12.

On the other hand, the personal computer 47 connected to the network 45 built in the company has the similar construction to that of the personal computer 12 described above in Fig. 9. However, in this case, since the network 45 is connected to the Internet 41 by the private line, the personal computer 47 connected to the network 45 is in a state the session to the service provider 21 is established. Accordingly, when the user inserts the memory card 11 into the personal computer 47, he can directly enter the authentication processing.

In this case, since the communication regulations of the internet 41 is determined according to the transmission control protocol/Internet protocol (TCP/IP), the authentication request to the specified server 22 from the personal computer 47 is conducted by the same protocol (TCP/IP).

Furthermore, in the case where the network 45 is guarded by the firewall 46, the authentication request data containing attribute information of the firewall 46 must be supplied to the specified server 22 from the personal computer 47. Accordingly, when the user inserts the memory card 11 into the personal computer 47, the personal computer 47 transmits the user specifying information formed of user ID and password for identity in the network connection information (Fig. 4) stored in the memory card 11, terminal type data (data showing the personal

processing unit 31D to convert the radio frequency (RF) received at the receiving/transmitting circuit 31E to the baseband signal as well as converting the baseband signal to the RF signal, man machine interface (MMI) unit 31F that is an interface between the microphone 31G and speaker 31H, display unit 31I and keyboard 31J connected respectively.

The CPU 31 executes various operations according to the operational program stored in the memory 31B, and controls each circuit depending upon the operations. The contents of various processings of the CPU 31A will be displayed on the display unit 31J formed by such as crystal display panel as required.

When the user enters the telephone number of the desired calling destination, the keyboard 31J transmits the data showing the telephone number to the CPU 31A. The CPU 31A transmits a connection request to the calling destination shown by the telephone number entered by the user via the receiving/transmitting circuit 31E. At this time, the portable telephone circuit 33 connects the line in response to the answer of the calling destination. When the line is connected, the receiving/transmitting circuit 31E supplies the RF signal from the calling destination received via an antenna (not shown in Fig.) to the baseband processing unit 31D and converts the RF signal to the baseband signal. And the baseband processing unit 31D, by supplying the converted baseband signal to the MMI unit 31F, outputs audio signal from the calling destination received from

the speaker 31H as sounds.

Moreover, when the user enters sounds via a microphone 31G, the MMI unit 31F supplies an input audio signal supplied from the microphone 31G to the baseband processing unit 31D, and here it converts the baseband signal to the RF signal. And the baseband processing unit 31D, by transmitting the converted RF signal to the portable telephone line 33 via the receiving/transmitting signal circuit 31E, transmits the RF signal to the circuit-connected called party. Thus, the user using the portable telephone 31 can receive and/or transmit conversations and a variety of informations between the called party.

At this point, when the user operating the portable telephone 31 inserts his memory card 11 into the slot for memory card (not shown in Fig.) of the portable telephone 31, the detecting contact point of the memory card 11 is connected to the contact point of the memory card interface 31C. And the interface processing unit 31N detects changes of the signal level for memory card detection (change from the logical "L" level to the logical "H" level), and by transmitting an interrupt signal to the CPU 31A, conducts the interrupt processing. Thus, the CPU 31A detects that the memory card 11 is inserted. The interface processing unit 31N is a processing block to conduct the protocol processing according to the interface specifications when receiving data with regard to the memory card 11. Thus, the interface processing unit 31N becomes in the state capable of

reading out the user specific information memorized in the memory card 11.

At this point, the CPU 31A reads out data in the memory card 11 via the memory card interface 31C, and by transmitting this to the specified server 22 of the service provider 21 via the receiving/sending circuit 31E, base station 32 (Fig. 2) and the portable telephone line 33 (Fig. 2), conducts the authentication request to the specified server 22.

When the memory card 11 is inserted in the portable telephone 31 as in the case of the authentication request sequence described above in Fig. 7, the CPU 31A detects the loading condition of the memory card 11 via the memory card interface 31C, and transmitting signal to the service provider 21 having the specified server 22 via the portable telephone line 33, secures the communication path.

The CPU 31A of the portable telephone 31, upon establishing the session by the information receiving/sending signal means stored in the portable telephone 31, such as point to point protocol (PPP) processing and wireless application protocol (WAP), transmits authentication request to the specified server 22. In this connection, in the case where the portable telephone 31 is not equipped with the PPP and WAP protocol function, circuits will be connected by such as Dual tone multiple frequency (DTMF) protocol.

Then, the CPU 31A transmits the user specifying information

formed of user ID and password for authentication in the network connection information (Fig. 4) stored in the memory card 11, terminal type data stored in the memory 31B of the portable telephone 31 in advance (data showing the personal digital cellular (PDC) telephone), information to specify the PDC, the telephone number of the caller of the PDC telephone 31 side, protocol information such as WAP used when connecting, and the terminal specifying information formed of various option data to the specified server 22 as the authentication request data D21 (specific information).

As described above in Fig. 8, the specified server 22 receives the authentication request data D21 to be transmitted from the user operating personal cellular telephone 31 at the communications unit 22A and supplies the received authentication request data D21 to the authentication unit 22B.

In the case where the contents of authentication request data 21 such as the user ID (certification ID) and the password agree with the data of the authorized user registered in advance, the authentication unit 22B judges that the user operating the dispatching source of the authentication request data D21 entered at this moment (i.e., portable telephone 31) is the authorized user, and registers user specifying information (user ID and password), that is the content of authentication request data D21, the terminal specifying information to specify the user operating the terminal device (portable telephone 31) in the database 22D

as the user and the operating terminal combined data D23 (terminal type data, information to specify the dispatching means, sender's telephone number of the portable telephone side and various option data). At this time, if the existing combined data is stored in the database 22D, the database 22D updates the data to the new combined data D23 to be supplied from the authentication unit 22B writing this over the existing composite data at this moment.

Thus, at this point, the data that the user will use the portable telephone 31 is registered in the database 22D.

At this point, message information such as electronic mail to be mailed from various terminal devices to the specific user will be stored in the application processing unit 22C of the specified server 22. And when returning the authentication answer data D27 corresponding to the authentication request data D21 to be transmitted to the specified server 22 from the portable telephone 31 to the portable telephone 31 from the specified server 22, if the message to the user operating the portable telephone 31 is arrived at the application processing unit 22C, the application processing unit 22C obtains the user using terminal device (portable telephone 31) from the combined data of the database 22D by the transmission command from the authentication unit 22B, and supplies the message information D25 and the type data of terminal device to the media conversion unit 22E.

The media conversion unit 22E converts the message to the user D25 to the data format corresponding the type of terminal device (portable telephone 31) to be used by the user at this time and transmits this to the terminal device (portable telephone 31) to be used by the user via the communications unit 22A as a message data D26.

Thus, at the time when the user inserting the memory card 11 into the portable telephone 31, registers the user's whereabouts in the specified server 22, the message to the user will be displayed on the display unit 31I of the portable telephone 31.

In this connection, the embodiment described above has dealt with the case of transmitting the message to the user itself to the portable telephone 31 from the specified server 22 when the user inserts the memory card 11 in the portable telephone 31. However, the message just to inform the user that the message has been arrived can be transmitted to the portable telephone 31. With such arrangement, when the user inserts the memory card 11 in the portable telephone 31, the CPU 31A of the portable telephone 31 can display such as "xx electronic mails have been arrived" on the display unit 31I and inform the user that messages are arrived.

In the case of transmitting the authentication request data D21 to the specified server 22 from the portable telephone 31, the authentication request data D21 can be encrypted by the

cipher algorithm forming one directional random pattern called as MD5 for example. By transmitting the encrypted authentication request data D21, tapping of data necessary for authentication such as the user ID and password can be prevented.

Thus, since the user inserts the memory card 11 in the slot of the portable telephone 31 when using the portable telephone 31, the user specific information and the terminal specific information of the terminal device (portable telephone 31) to be used can be registered in the specified server 22 as a set. And thus, the specified server 22 can grasp the user's whereabouts.

In this connection, in the authentication sequence described above has dealt with the case of the specified server 22 transmitting the message for the user to the portable telephone 31 when the user inserts the memory card 11 in the portable telephone 31. However, the user transmitting the message request to the specified server 22 by operating the keyboard (not shown in Fig.) of the portable telephone 31, the message to the user can be transmitted from the specified server 22 to the portable telephone 31 as in the case of television set 13 described above in Fig. 9.

At this point, under the condition in which the user inserts the memory card 11 in the portable telephone 31 and the user's address is registered in the specified server 22 as in the case of the television set 13 described above in Fig. 10, if the message to the user D14 (Fig. 8) is transmitted from other

terminal device to the specified server 22, the specified server 22 receives the message D24 at the communications unit 22A and transmits this to the application processing unit 22C. The application processing unit 22C detects the user's address from the database 22D based on the specific information (such as user ID) of the user, who is the addressee of the message D24 contained in the message D24.

Then, the application processing unit 22C supplies the resulting information showing the user's address (portable telephone 31) and information showing the type of terminal device and the message to the user D24 to the media conversion unit 22E.

The media conversion unit 22E converts the message to the user D24 to the data format corresponding to the type of terminal device to be used by the user (personal computer 12) and transmits this to the terminal device to be used by the user (portable telephone 31) via the communications unit 22A as the message data D26 through the portable telephone line 33.

Accordingly, the specified server 22, by transmitting the message information such as electronic mails mailed to the user from the other terminal device to the portable telephone 31, can transmit the message information to the user, the addressee of this message.

Thus, the portable telephone 31 displaying the electronic mail transmitted from the specified server 22 on the screen of the display unit 31I, the user using the portable telephone 31

can confirm the electronic mail to the user on the display screen of the display unit 31I.

The portable telephone 31 receiving the message information D24, transmits an answer signal to the specified server 22, and responding this the specified server 22 informs the receipt of the message information D24 at the portable telephone 31 with ACK (acknowledge) to the terminal device, the sender of the message D24.

When the user pulls out the memory card 11 from the slot of the portable telephone 31, the contact point for detection of the memory card 11 is separated from the contact point of slot of the memory card interface 31C. And then the interface processing unit 31N detects the change (the change from the logical "H" level to the logical "L" level) of the signal level for memory card for detection, and transmitting an interrupt signal to the CPU 31A, conducts the interrupt processing. Thus, the CPU 31A detects that the memory card 11 is extracted.

At this point, the CPU 31A transmits an erasure request containing the user ID and terminal type data (data showing the type of portable telephone 31) to the specified server 22 as in the case of television set 13 described above in Fig. 11. And the specified server 22 receiving this request, erases the user and terminal device (portable telephone 31) combined data and sends back an answer signal to the portable telephone 31. With this arrangement, the portable telephone 31 from which the memory

card 11 is pulled out is erased from the registration as the user operating terminal device (location) in the database 22D of the specified server 22.

In this connection, in a state in which the user inserts the memory card 11 in the portable telephone 31, if the user conducts the predetermined input operation, the CPU 31A of the portable telephone 31 reads out the telephone directory data and address book data stored in the third area AR13 in the memory card 11 described above in Figs. 4 and 5 based on the data type) information D11 and D13A having the TLV format data structure, and displays these on the display unit 31I as required. Moreover, if the telephone directory data and address book data are not stored in the third area AR13, the CPU 13A can store various informations in the area by the user's input operation.

Accordingly, in the case of using either one of terminal devices (television set 13, personal computers 12, 47 or portable telephone 31), the user only inserting the memory card 11 into that terminal device, the authentication request data will be transmitted to the specified server 22 from the terminal device and the terminal device to be used by the user can be confirmed at the specified server 22.

In this case, the specified server 22 specifies the user and the user operating terminal device, and after the completion of the authentication processing, if the line between the terminal and the specified server is cut off, the specified

server 22 can specify the user using terminal device.

According to the foregoing construction, the specified server 22 registers the user's address to the database 22D as the information of the user operating terminal device. And when the electronic mail to the user is mailed from the other terminal device, the specified server 22 detects the addressee of the electronic mail, the user's address (i.e., terminal device) from the database 22D.

Thus, since the specified server 22 grasps the user's address in the database 22D, the electronic mail can be transmitted to the addressee of the electronic mail, i.e., the user's address, detected at the database 22D, and as a result, it becomes unnecessary to provide a mail box in each terminal device to be used by the user.

Furthermore, since the user, conducting the authentication processing to the specified server 22 at the time when using the terminal device, registers the terminal device he is using in the database 22D of the specified server 22, the specified server 22 can always grasp the user using terminal device (i.e., the user's whereabouts) even in the case where the user using terminal device is not connected to the network.

Accordingly, even if the terminal device in use by the user is not connected to the network, by detecting the user's address from the database 22C, the user's address (terminal device) can be specified. And thus, message information such as electronic

mails to the user can be transmitted to the user.

Furthermore, by controlling the user ID and the user's address (the terminal device in use) by the specified server 22 connected to multiple networks, it becomes unnecessary for the user to have different mail address in each network or the service provider.

In this connection, when the user pulls out the memory card 11 from the terminal device, the CPU of the terminal device detects that the memory card 11 is extracted and informs this to the specified server 22. Thus, the specified server 22 can confirm that the user has completed the use of terminal device and waits for the notice of electronic mail to the user till the user inserts the memory card 11 to either one of terminal devices.

Moreover, by registering the type of terminal device to be used by the user in advance in the specified server 22, the specified server 22 conducts the processing compatible with the terminal device that the user is using. For example, when the user is using the portable telephone 31, if the electronic mail to the user is arrived to the specified server 22, the media conversion unit 22E of the specified server 22 sends an arrival notice of the electronic mail upon converting this to audio signal, to the portable telephone 31 that the user is using. Thus, the user can access to the specified server 22 by using the terminal device (personal computer 12) capable of reading the electronic mail responding to the arrival notice by the sound and

can receive the electronic mail.

Moreover, in the case where the user is using the personal computer 12, the specified user 22 can provide the existing processings such as Post office protocol (POP) 3 and Internet message Access protocol (IMAP) 4.

Furthermore, in the case where the user uses the terminal device such as a portable telephone not equipped with the information interface, the specified server 22 can transmit the message information such as electronic mail by using the existing transmission method to the terminal device.

According to the foregoing construction, since the user transmits the authentication request data to the specified server 22 and conducts the authentication processing when he uses the terminal device, the specified server 22 can grasp the user's address (i.e., the terminal device in use).

Furthermore, the embodiment described above has dealt with the case of using the television set 13, personal computer 12, 47 and portable telephone 31 as the terminal device. However, the present invention is not only limited to these but also various other terminal devices can be widely applied.

Furthermore, the embodiment described above has dealt with the case of transmitting the user specific information stored in the memory card 11 to the specified server 22 as authentication request data by inserting the memory card 11 into the terminal device. However, the present invention is not only limited to

terminal device, the terminal device can transmit the authentication request data to the specified server 22 responding to the user's input operation.

According to the present invention as described above, in the case where the user uses the terminal device, by transmitting the user specific information and the specific information of the terminal device to be used by the user to the network server as the specific information, the network server can specify the terminal device in use by the user.

While there has been described in connection with the preferred embodiments of the invention, it will be obvious to those skilled in the art that various changes and modifications may be aimed, therefore, to cover in the appended claims all such changes and modifications as fall within the true spirit and scope of the invention.

WHAT IS CLAIMED IS

1. A network system to be connected to a terminal device and a network server via the predetermined communication means, comprising:

said terminal device for transmitting the user specific information and the information of said terminal device to be used by said user as the specific information when the user uses said terminal device; and

said network server to specify said terminal device being used by said user by memorizing said specific information.

2. The network system according to claim 1, wherein

said terminal device comprising an interface means equipped with the memory means in which said user specific information is stored, and transmits said specific information to said network server when said memory means is loaded.

3. The network system according to claim 2, wherein:

said terminal device transmits information showing the completion of said user operation to said network server when said memory means is extracted from said interface means.

4. A terminal device to be connected to the network server via the predetermined communication means, comprising:

a specific information transmission means for transmitting

being used by said user based on said specific information of said memory means.

8. The network server according to claim 7, wherein said specifying means, transmits message information to said user to the terminal device in use by said user specified based on the specific information of said memory means.

ABSTRACT OF THE DISCLOSURE

A network system, terminal device and network server capable of specifying the user on the network even if the user uses any one of terminal devices in the network system to which terminal devices and network server are connected via the predetermined communication means. When the user uses the terminal device 12, 13, 31 or 47, by transmitting the user private information and the user operating terminal device specific information to the network server 22 as the specific information, the network server 22 can specify the terminal device 12, 13, 31 or 47 in use by the user.

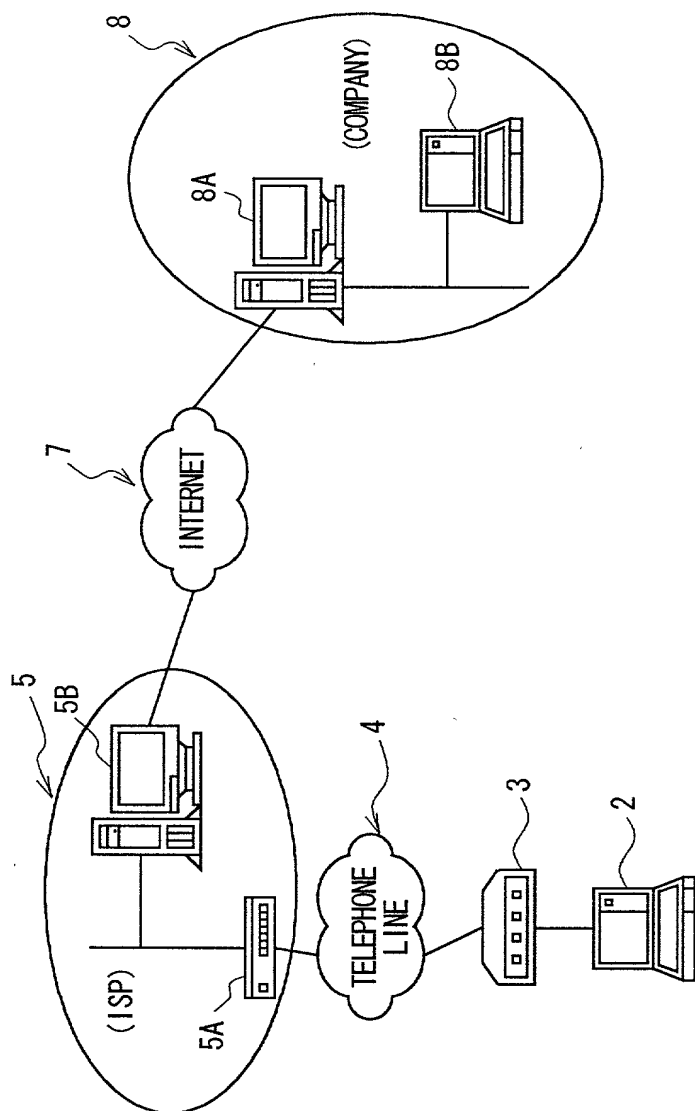


FIG. 1

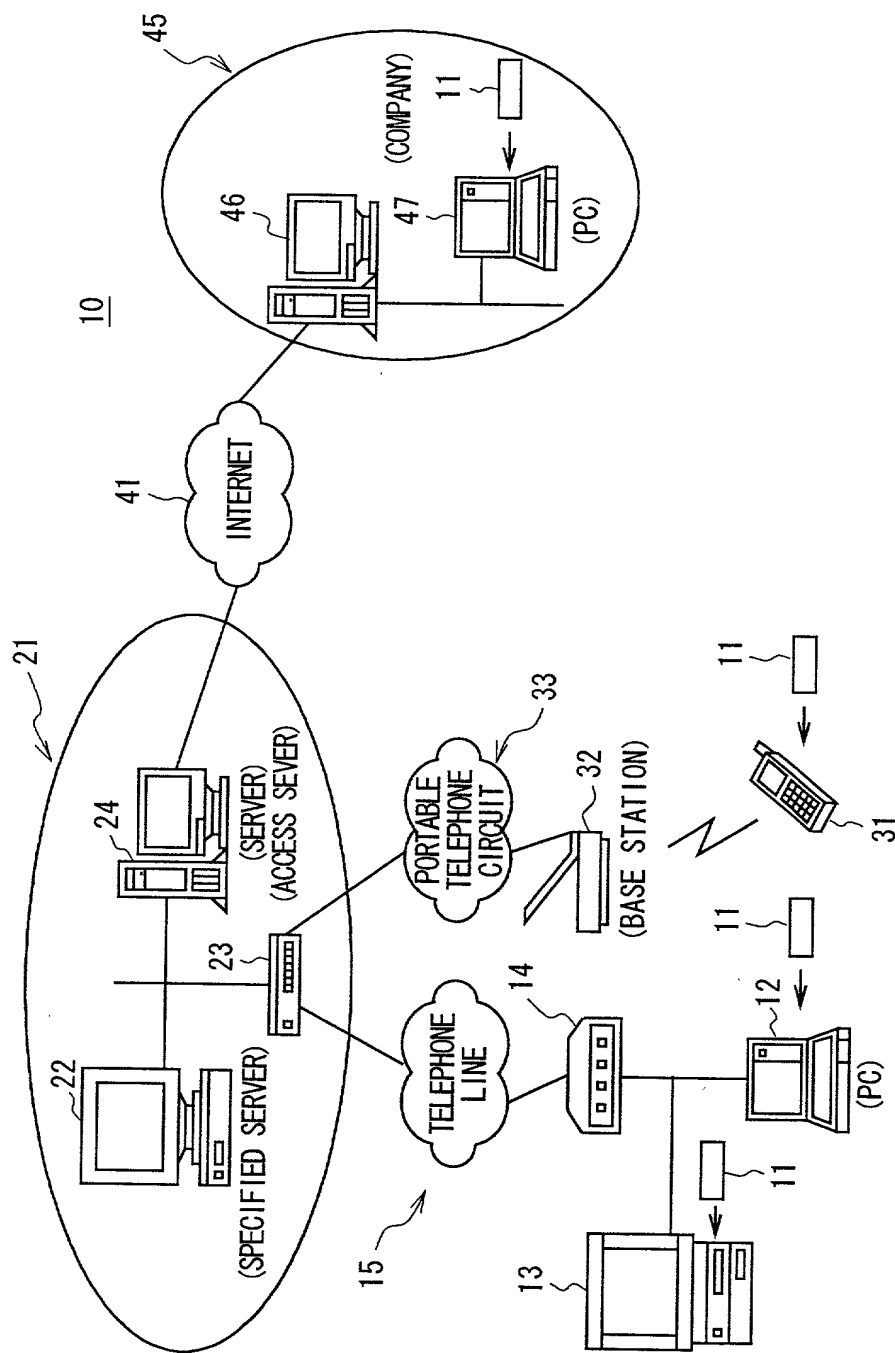


FIG. 2

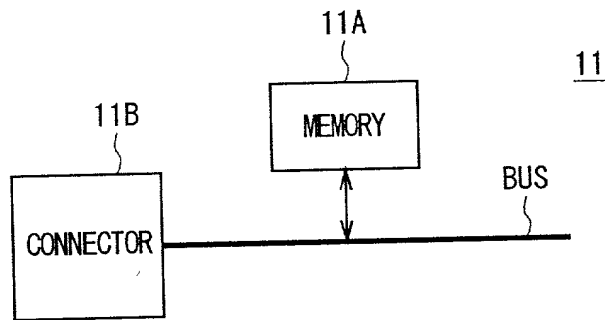


FIG. 3

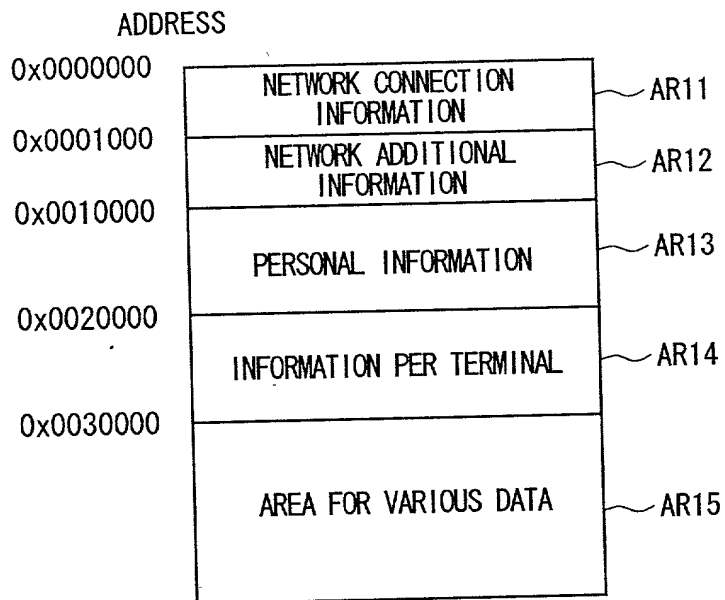


FIG. 4

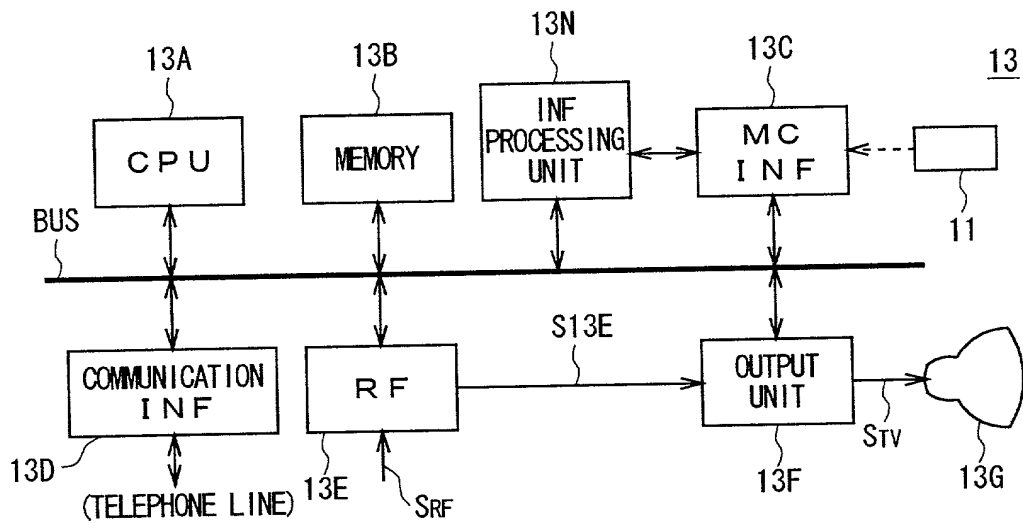


FIG. 6

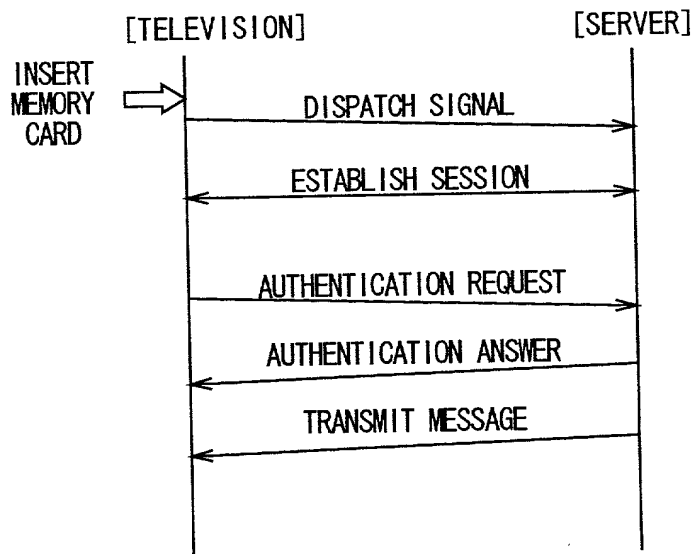


FIG. 7

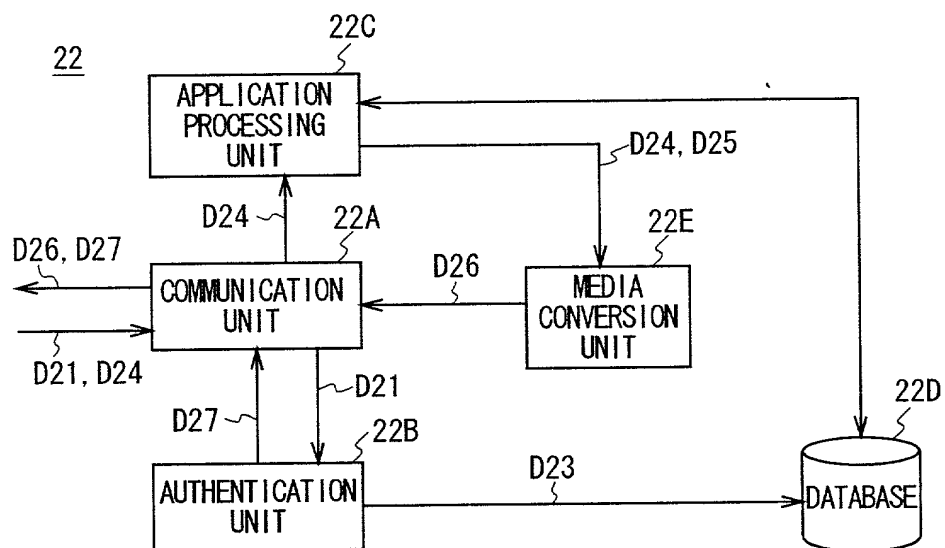


FIG. 8

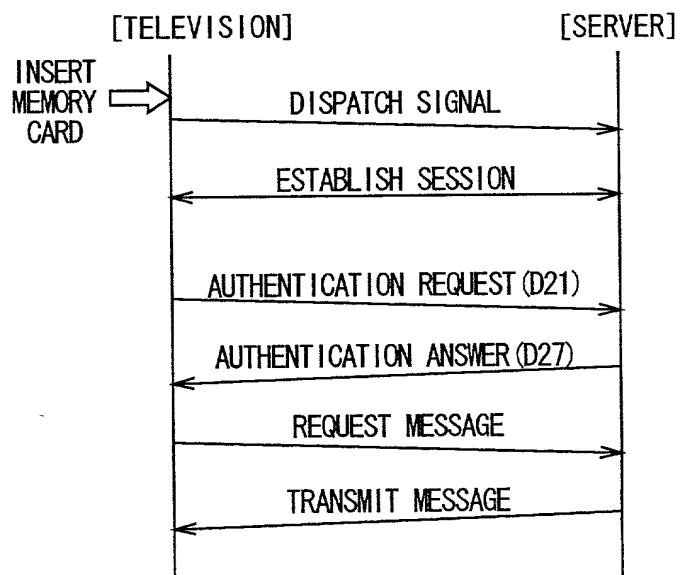


FIG. 9

2

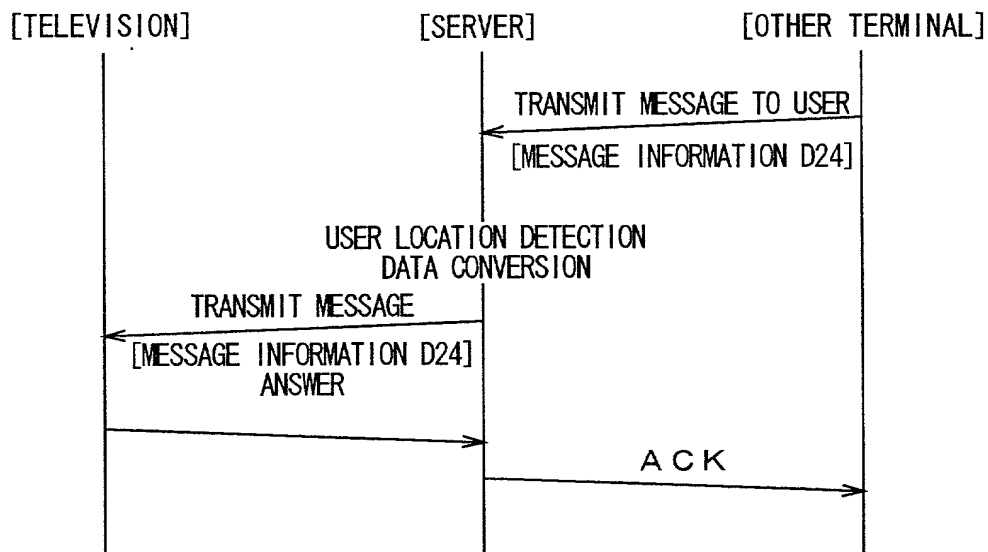


FIG. 10

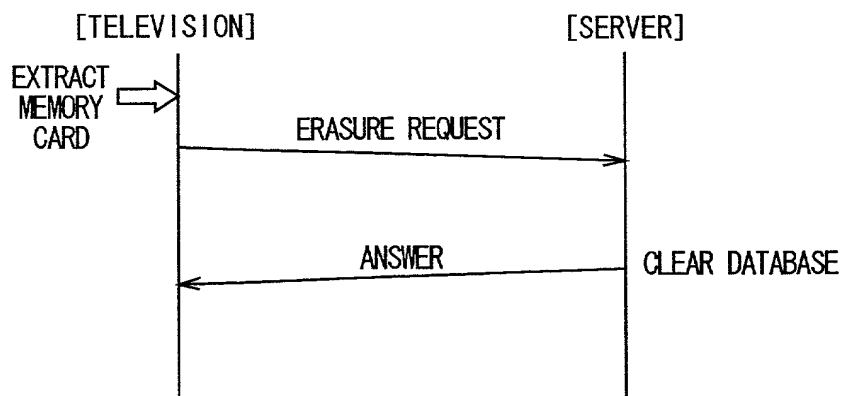


FIG. 11

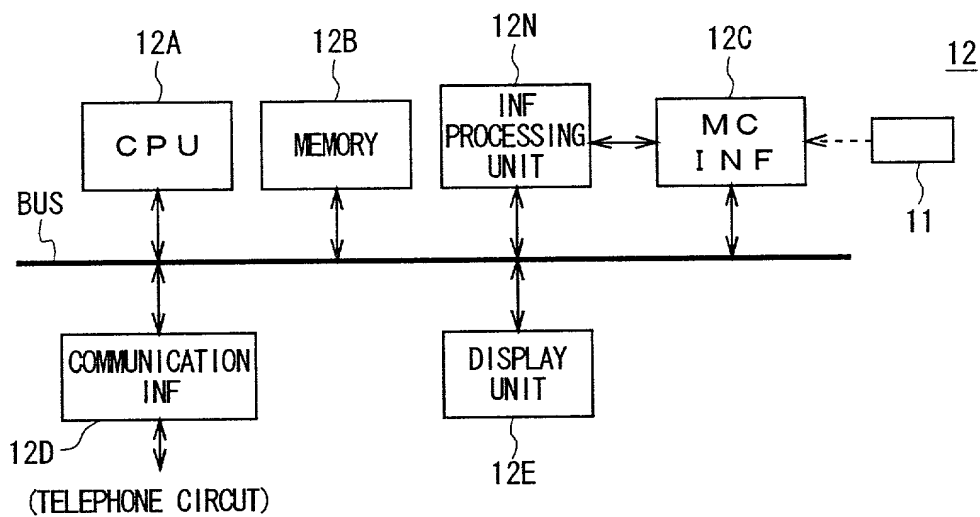


FIG. 12

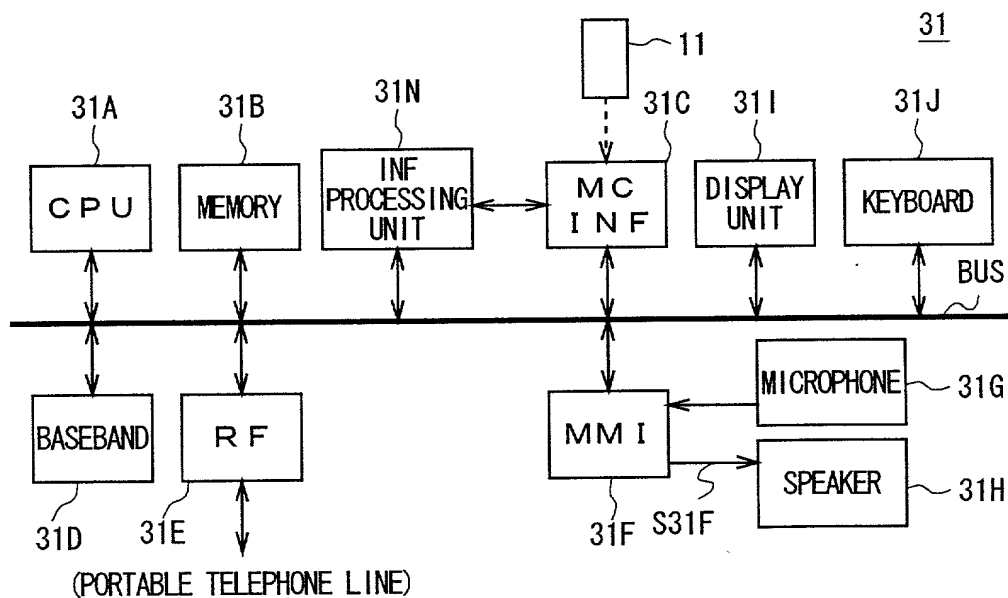


FIG. 13

DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

NETWORK SYSTEM, TERMINAL DEVICE AND NETWORK SERVER
the specification of which
(check one)

 X is attached hereto.

 was filed on as

Application Serial No.

and was amended on
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
<u>P11-055625</u>	<u>Japan</u>	<u>March 3, 1999</u>	<u> X </u>	<u> </u>

Declaration and Power of Attorney

Page 2

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
_____	_____	_____
_____	_____	_____

And I hereby appoint Jay H. Maioli, Reg. No. 27,213; Donald S. Dowden, Reg. No. 20,701; William E. Pelton, Reg. No. 25,702; Peter J. Phillips, Reg. No. 29,691; Gerald W. Griffin, Reg. No. 18,886; Ivan S. Kavrukov, Reg. No. 25,161; Christopher C. Dunham, Reg. No. 22,031; Norman H. Zivin, Reg. No. 25,385; John P. White, Reg. No. 28,678; and Robert D. Katz, Reg. No. 30,141; and each and all of them, all c/o Cooper & Dunham, 1185 Avenue of the Americas, New York, NY 10036 (Tel. (212) 278-0400), my attorneys, each with full power of substitution and revocation, to receive the patent, to transact all business in the Patent and Trademark Office connected therewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to

JAY H. MAIOLI
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
Tel. (212) 278-0400

Reg. No. 27,213

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or

First joint inventor Yoji Kawamoto

Inventor's signature _____

Citizenship Japanese Date of Signature _____

Residence Tokyo, Japan

Post Office Address c/o Sony Corporation, 7-35 Kitashinagawa, 6-chome

